



# Glass-Lined Electric Tank



Become part of the  
solution..



250L

315L


400L

## FEATURES & BENEFITS:

- Solar Ready Electric Tank
- Designed for the Australian market
- Quality vitreous enamel lined tank
- Backed by the Apricus National Guarantee
- 7 Year Warranty



MODEL		250L	315L	400L
Rated Capacity	litres	250	315	400
Physical Volume	litres	274	343	445
Height	mm	1406	1700	1731
Diameter	mm	648	648	731
Thermal Efficiency		98%	98%	98%
Element Height	mm	170	170	190
Weight (Empty)	kg	84	102	150
Inlet Size	in	3/4"	3/4"	3/4"
Valve Connection Size	in	3/4"	3/4"	3/4"
Max Thermostat Setting	°C	75	75	75
Dead Band	°C	8	8	8
Heat Element Power	kW	3.6	3.6	3.6
Warranty				
- Cylinders		7 years	7 years	7 years
- Parts & Labour		1 year	1 year	1 year
Safety Valve Setting Pressure	kpa	850	850	850
Max Cold Water Pressure	kpa	600	600	600

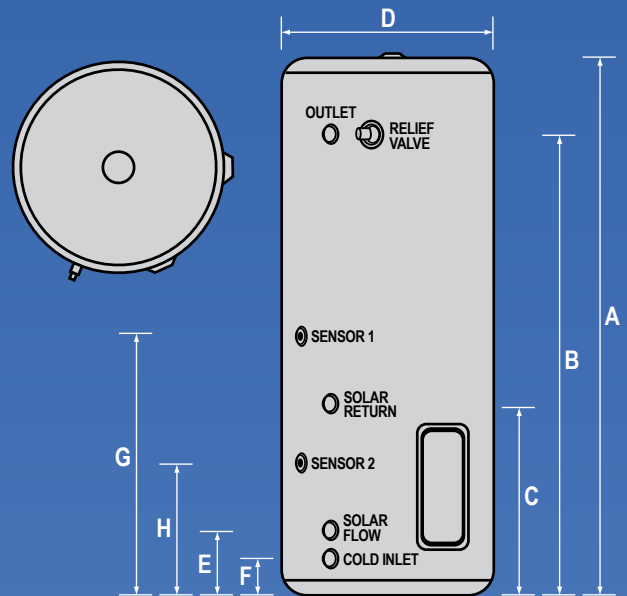

TANK	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
250	1388	1167	564	648	174	74	759	369
315	1682	1470	564	648	174	74	841	369
400	1731	1474	564	731	174	74	841	369

\* The solar systems using Apricus solar-ready tanks meet AS2712 standards and are REC modelled



Ph 1300 277 428